DOP 2320









DOP 2320

The DOP 2320 is a hydraulically driven, submersible dredge pump with wear resistant pump parts.

GENERAL

Туре	
Build	
Brand	

PUMP

Mixture output Pump speed Power Spherical passage Pump shell

: 500-1000 m3/h : 800 rpm : 135 kW : 125 mm : Bainitia Nodular

: Bainitic Nodular

DIMENSIONS

Weight	: 2600 kg
Length	: 3700 mm
Width	: 1700 mm
Height	: 1300 mm
Diameter	: 1220 mm
Suction diameter	: 230 mm
Discharge diameter	: 250 mm
Jetwater connection	: 100 mm

HYDRAULIC DRIVE

Manufacturer	
Required oil flow	
Required oil pressure	

: Rollstar : 430 l/min : 225 bar


40 Head [MWC] -800 [0 %] 35 30 700 25 -600 20 15 500-10 -400 -300-5 Flow [m3/h] 0 300 400 500 600 700 800 900 1000 1100 1200 1300 1400 0 100 200

WWW.DREDGEPUMPSOLUTIONS.COM

All of the information given in this spec sheet is believed to be accurate; however, DPS assumes no responsibility for any errors. DPS specifically disclaims any and all liability for any claims or damages that may result from providing the information contained on this sheet. All specifications are subject to change without notice. v1.3

DOP 2320

MvO 3337

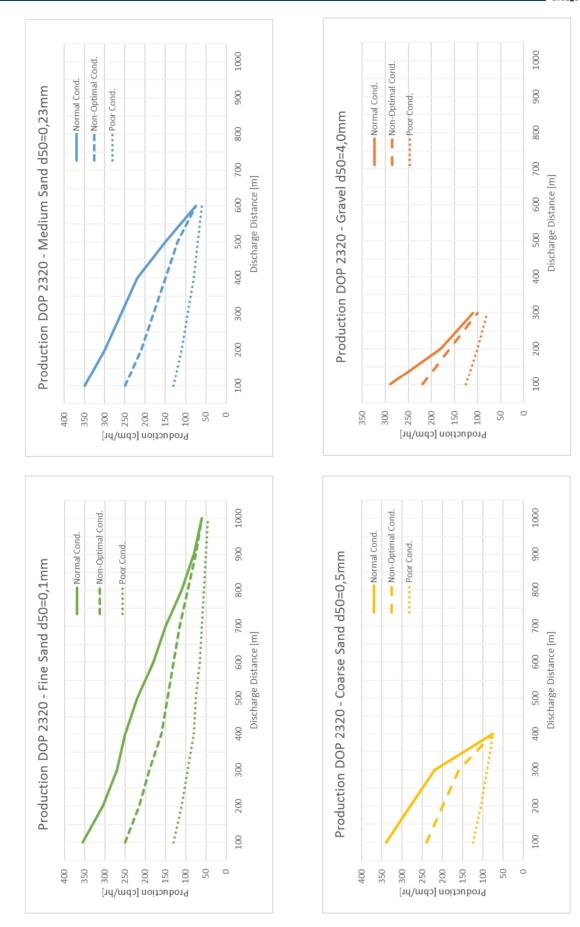

WWW.DREDGEPUMPSOLUTIONS.COM

All of the information given in this spec sheet is believed to be accurate; however, DPS assumes no responsibility for any errors. DPS specifically disclaims any and all liability for any claims or damages that may result from providing the information contained on this sheet. All specifications are subject to change without notice. v1.3